


LED PANEL LIGHT BACK LIT PRIMOS

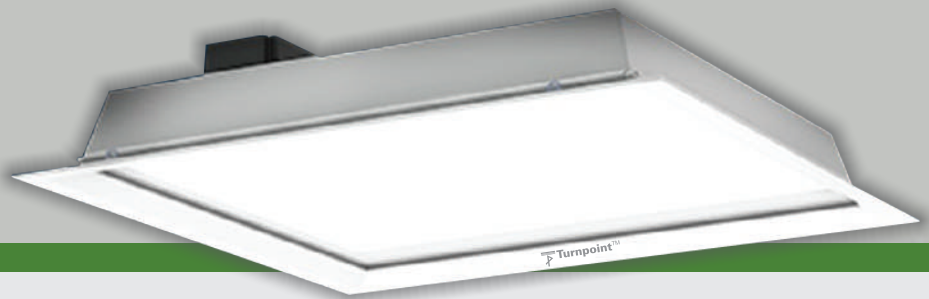

Specifications

Model	PRIMOS
Input power	40W, 48W
Cut out Dimension	595mm × 595 mm
Input voltage	100-285 Vac
Frequency	47-55Hz
Power Factor(pf)	>0.95
Thd (%)	<15
Driver Efficiency (%)	>85
Short-circuit Protection	Input over voltage cut off
Led Type	Everlite / Epistar / Kingbrighter / Edison (LM80)
Lumen	5400lm, 6700lm
Driver Type	Constant Current
Light Efficiency (lm/W)	>85
CCT	2700, 4000, 6000 (+/-10%)
Led Life Time (hrs)	50000 hrs
CRI (Ra)	≥80
Housing (body)	Aluminium Diecast with Powder Coating
Diffuser	PS
Working Temperature	-15°C to 55°C
IP Grade	IP20