


LED

HI-BAY LIGHT

DENEb-P (with lens)

DENEb (without lens)

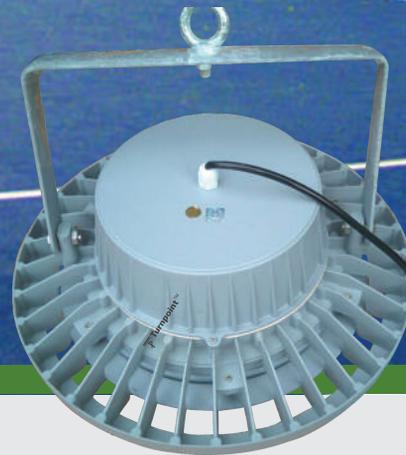

Specifications

Model	DENEb	DENEb-P (with lens), DENEb (without lens)
Input power	45W	70W
Voltage Continuous	140-277VAC	140-277VAC
Voltage Short Time	440V for 30 sec	440V for 30 sec
Frequency	47-53Hz	47-53Hz
Power Factor	<15	<0.95
Thd	<15	<10
Driver Efficiency	>85	>90
Input Surge 4KV	No Effect	No Effect
Cover	Toughened Glass	Toughened Glass
LED Type	OSRAM/LUMILED/CREE/LG/SEOUL	OSRAM/LUMILED/CREE/LG/SEOUL
Lumen	4500lm	7700lm
Fixture Efficiency	100 lumens/watt	110lumens/watt
Driver Type	Constant Current	Constant Current
Junction Temp	100deg C	100deg C
CCT	5700K	5700K
LED Life Time (hrs)	50000 hrs	50000 hrs
CRI	>=70	>=70
Housing Body	Alumunium	Alumunium
Working Temp	-20°C To 55°C	-20°C To 55°C
IP Grade	IP65	IP65